

How to Demonstrate Memorized Quilt Seaming

Memorized Seams


Memorized seams are extremely important when creating Y seams found in many quilt blocks. A perfect example would be the tumbling block pattern. These blocks are created from 60° triangles.



The Patchwork function is found in Sewing Applications.

Patchwork

- The stitch length is shortened for secure seams when piecing a quilt top. The stitch length can be adjusted on the touch screen.

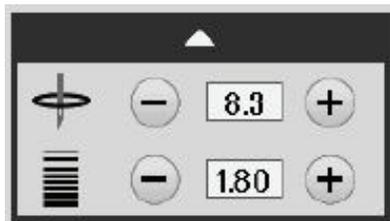


- Memorized seams are also useful for pintucks, darts, and pleats.

Machines with this feature:


eXpressive 920
eXpressive 900
eXcellence 780
eXpressive 860
eXcellence 680

Demonstration

1. Select Locking Stitch. Attach 1/4" Seam foot O.
2. On the wrong side of one 60° triangle draw a line as shown to indicate the stopping point for the piece.

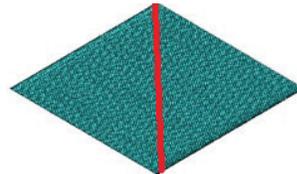

3. Place the marked triangle right sides together to the second triangle, then use the guide lines in the needle plate to place the fabric. Place the fabric so that the angled edge is on the corresponding dotted angled line, and the opposite edge is butted up against the guide of the foot. The needle is now exactly 1/4" from the end of the fabric.

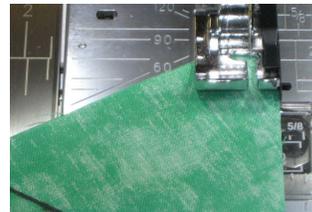

4. Set the speed control to slow and start sewing...when the needle reaches the marked line...press the reverse button and the machine will lock off and stop.
5. A message will appear. Touch OK to memorize the seam.



6. Continue sewing as many pieces together as desired and every seam will be the exact length! This will make piecing stars and tumbling blocks so easy
7. Touch the Go Back Arrow to return to the previous screen.
 - Use the optional Clearview Quilting Foot and Guide Set (item #202089201) if you do not want to use the guide, this foot is especially useful when making half square triangles. This foot also has the markings for 1/8" seams for miniatures.

